

LIFTX

3XL



www.liftx.com.tr

3XL



Towing capacity up to 30,000 kg

Boasting a towing capacity of 30,000 kg, the 3XL is one of the most powerful walk-behind tow tugs on the market. Its strength lies in its robust design and high-performance electric motor – ideal for moving heavy loads such as industrial trolleys, carts, semi-trailers and more. And with zero emissions, it's perfectly suited for indoor use as well.

Unmatched traction and control

This agile workhorse takes on the heaviest jobs but remains remarkably light and easy to handle. With electric power steering and optional remote control, you can move even the largest loads effortlessly, even on inclines. Its solid tyres guarantee unmatched traction. We can optionally equip the 3XL with a lifting cylinder with a lifting capacity of 3,000 kg

Efficient and sustainable logistics

Losing valuable time to heavy manual work? The 3XL is here to help. This walk-behind tow tug optimises workflows and improves working conditions – all in a sustainable way. Like all our electric tow tugs, it's low-maintenance, fully electric and emission-free.





3XL / Couplings

LIFTX



VLKA00051

Rockinger coupling RO244A35002



VLKA09573

Industrial hook coupling with
35 mm (≈ 1.38 in) pin



VMON10713

Rockinger RO560A6000C with
50 mm (≈ 1.97 in) pin



VMON10846

Hydraulic cylinder coupling,
3XL



VMON10994

Rockinger RO245A45500



VMON10998


Vertical hydraulic coupling,
250 mm (≈ 9.8 in)



VMON10806

Vertical hydraulic coupling,
700 mm (≈ 27.6 in)

3XL	
Maximum towing capacity	30,000 kg (≈ 66,138 lbs)
Maximum tractive force	x
Voltage	48 V
Drive system	Differential drive
Motor	10 kW
Brake system	Regenerative
Parking brake	Electromagnetic
Horn	Yes
Battery indicator	Yes
Forward speed	5 km/h (≈ 3.1 mph)
Reverse speed	5 km/h (≈ 3.1 mph)
Standard drive wheels	Solid rubber
Steering wheel	Polyurethane
Machine weight including battery	1,750 kg incl. battery (≈ 3,858 lbs)
Maximum permissible counterweight	1,800 kg (≈ 3,968 lbs)
Dimensions LxWxH	1913 × 1248 × 1554 mm (≈ 75.3 × 49.1 × 61.2 in)
Standard battery	8 × 6 V 230 Ah AGM, maintenance-free
Battery charger	External 230 V 40 A

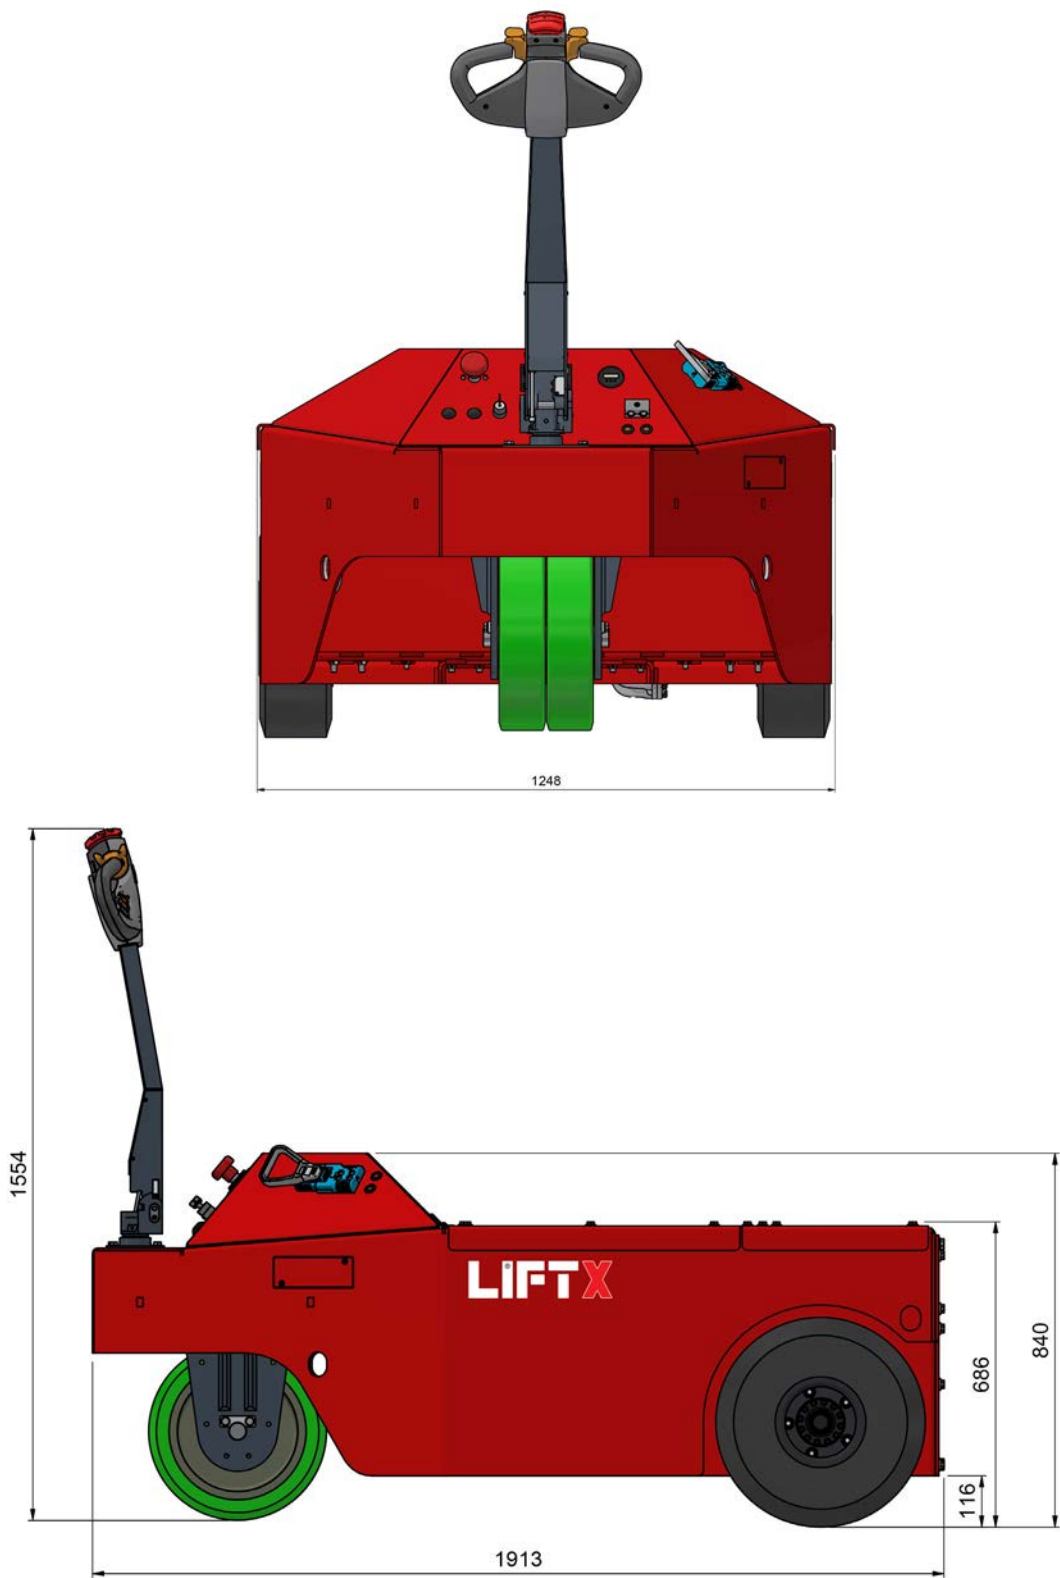

www.liftx.com.tr

LIFTX