

# LIFTX

4XL



[www.liftx.com.tr](http://www.liftx.com.tr)

## **Towing up to 40,000 kg**

The 4XL is the most powerful walk-behind tow tug on the market, purpose-built for heavy trailers, industrial trolleys and other substantial loads. With its two powerful drive motors, this electric tow tug can pull even the heaviest loads, including on inclines. And with its electric power steering and optional remote control, it moves with remarkable ease. It's a strong and silent force you can always rely on.

## **100% electric and emission-free**

Like all our electric tow tugs, the 4XL is equipped with a high-quality dual drive train. With zero emissions, it's also perfectly suited for indoor use. Its high-capacity battery delivers a long runtime, ideal for companies looking to operate more sustainably.

## **Higher efficiency, lower costs**

We can optionally equip this electric tow tug with a convenient hydraulic cylinder to lift trailers and containers and transfer their weight onto the wheels. Losing valuable time to heavy manual work? Consider adding this remarkably versatile, whisper-quiet powerhouse to your operations. It's a surefire way to optimise workflows and boost comfort on the shop floor.





## 4XL / Couplings

# LIFT<sup>®</sup>X




### VLKA09573

Industrial hook coupling  
with 35 mm pin ( $\approx 1.38$  in)




### VMON10713

Rockinger RO560A6000C pin  
(50 mm  $\approx 1.97$  in)

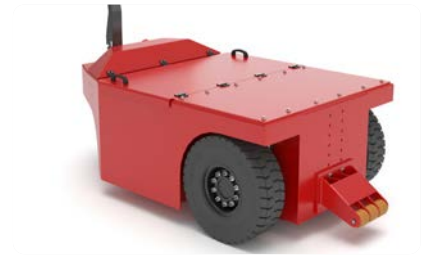

### VMON10737



4XL wheely bar

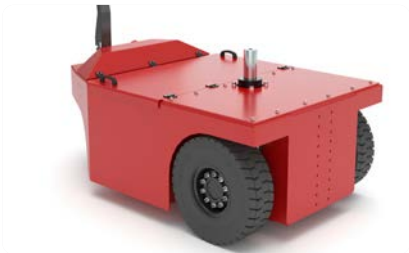

### VMON11214

Hydraulic base coupling  
4 kW – 48 V/ACVM

| 4XL                               |                                                 |
|-----------------------------------|-------------------------------------------------|
| Maximum towing capacity           | 40,000 kg (≈ 88,185 lbs)                        |
| Maximum tractive force            | 25,000 N                                        |
| Voltage                           | 48 V                                            |
| Drive system                      | Dual drive                                      |
| Motor                             | 2 × 8 AC                                        |
| Brake system                      | Regenerative                                    |
| Parking brake                     | Hydraulic                                       |
| Horn                              | Yes                                             |
| Battery indicator                 | Yes                                             |
| Forward speed                     | 5 km/h (≈ 3.1 mph)                              |
| Reverse speed                     | 5 km/h (≈ 3.1 mph)                              |
| Standard drive wheels             | Solid rubber                                    |
| Steering wheel                    | Polyurethane                                    |
| Machine weight including battery  | 1,725 kg incl. battery (≈ 3,802 lbs)            |
| Maximum permissible counterweight | 2,940 kg (≈ 6,482 lbs)                          |
| Dimensions LxWxH                  | 2024 × 1234 × 1600 mm (≈ 79.7 × 48.6 × 63.0 in) |
| Standard battery                  | 48 V 420 Ah full traction                       |
| Battery charger                   | External 230 V 45 A                             |

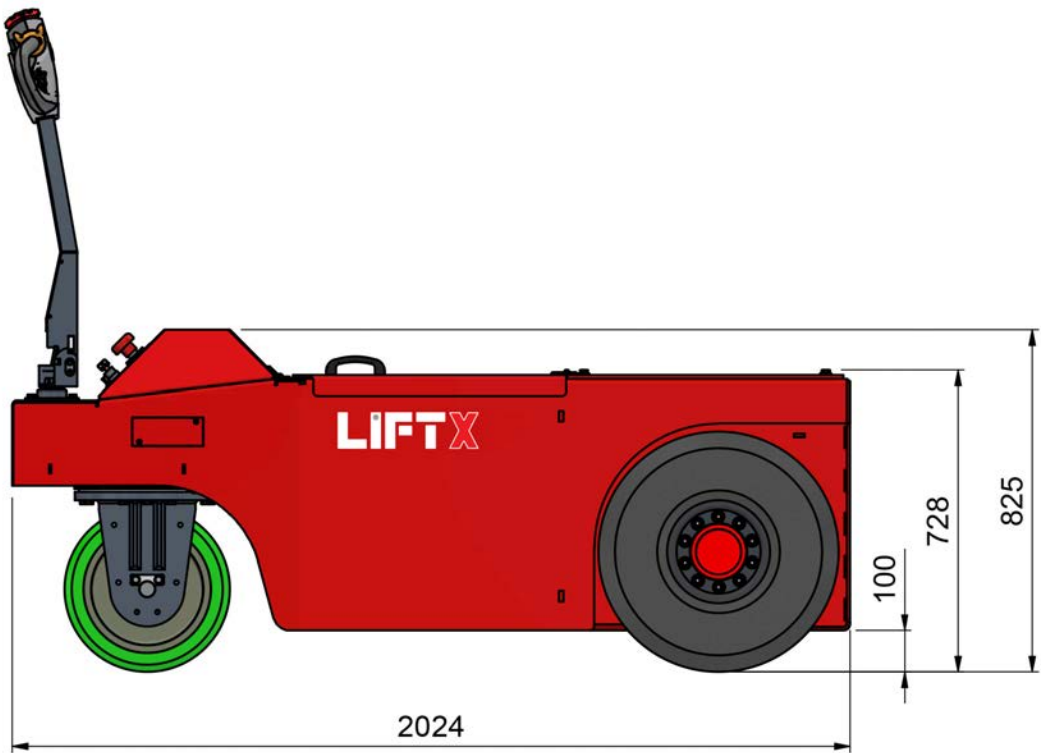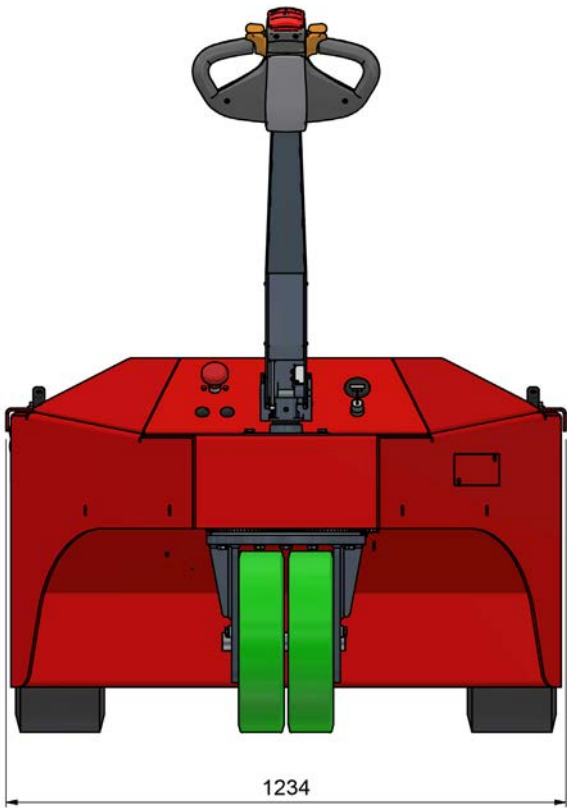

[www.liftx.com.tr](http://www.liftx.com.tr)

**LIFTX**