

LIFTX

650



www.liftx.com.tr

650

LIFTX

Compact yet powerful

For a powerful electric tow tractor in a small package, look no further than our 650 – a quiet powerhouse with a compact design and remarkably smooth steering. Effortlessly move loads up to 2,000 kg, making your daily work easier, quieter and hassle-free.

100% electric and emission-free

Electric tow tractors are ideal for companies committed to sustainability. The 650 boosts efficiency on the work floor, without any extra effort required from you. Thanks to its built-in battery charger, recharging is quick and easy. The battery is low-maintenance, as is the optional lithium battery.

Stand-on or sit-on

The 650 comes as a sit-on model with a comfortable seat as standard. A stand-on model is also available. What's more, we can optionally equip the 650 with a handy tool kit. Whatever your requirements, we've got the perfect solution for you.







MMON03475

Pin coupling, Sulo tow hook,
20 mm (≈ 0.79 in)



MMON04676

Pin coupling, 30 mm straight,
zinc-plated (≈ 1.18 in)



VLKA00051

Rockinger coupling RO244A350022



VLKA01851

50mm ball coupling (≈ 2 in)



VLKA04771

VBA connection, 32 mm eye,
open (≈ 1.26 in)



VLKA04774

VBA connection, 32 mm eye,
closed (≈ 1.26 in)



VLKA07544

VBA heavy eye, 32 mm open,
with strip latch (≈ 1.26 in)



VLKA09353



Industrial spring-mounted hook
coupling with 25 mm pin (≈ 0.98 in)



VLKA09471

Industrial double hook coupling, 25 mm
pin (≈ 0.98 in)

650	
Maximum towing capacity	2,000 kg (≈ 4,409 lbs)
Maximum tractive force	3,500 N (≈ 787 lbs□)
Voltage	24 V
Drive system	Differential drive
Motor	1,200 W AC
Brake system	Mechanical foot brake
Parking brake	Electromagnetic
Horn	Yes
Battery indicator	Yes
Forward speed	14 km/h (≈ 8.7 mph)
Reverse speed	6 km/h (≈ 3.7 mph)
Standard drive wheels	Pneumatic
Steering wheel	Pneumatic
Machine weight including battery	250 kg incl. battery (≈ 551 lbs)
Maximum permissible counterweight	300 kg (≈ 661 lbs)
Dimensions LxWxH	1,356 × 758 × 1,211 mm (≈ 53.4 × 29.8 × 47.7 in)
Standard battery	24 V 100 Ah AGM battery
Battery charger	Internal 230 V 25 A

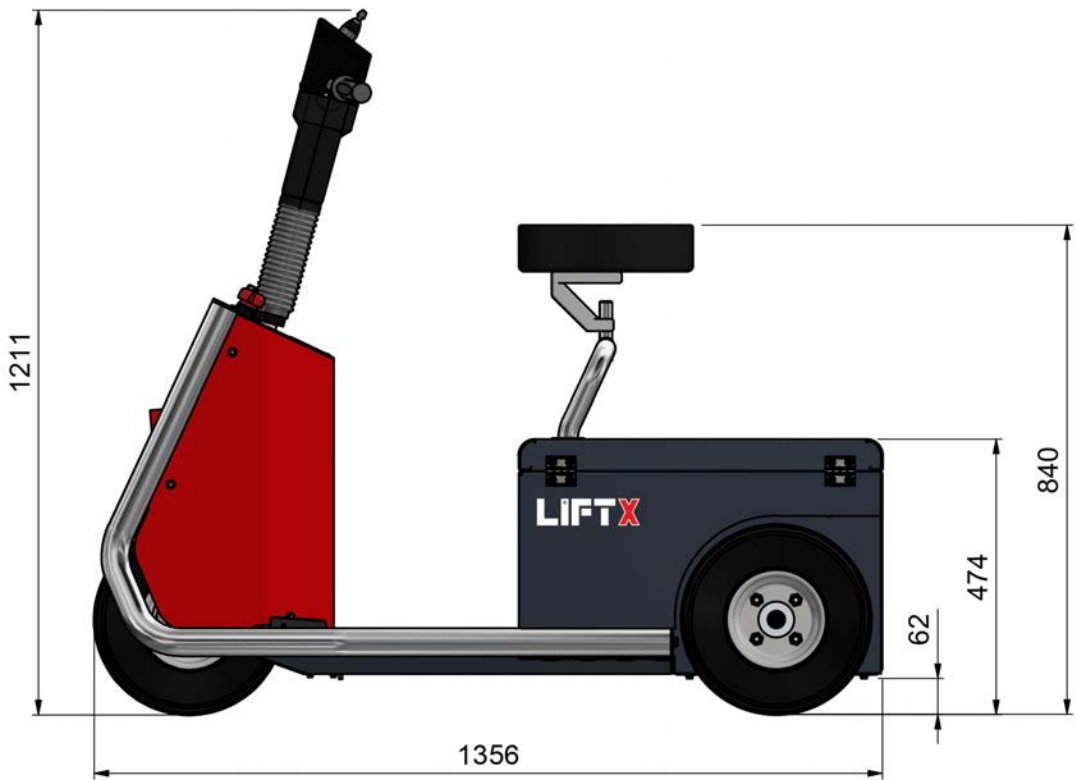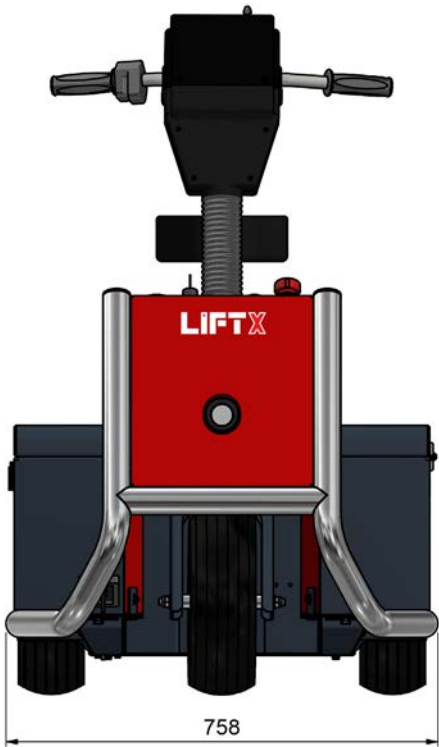

www.liftx.com.tr

LIFTX