

LIFTX

XL



www.liftx.com.tr

XL

LIFTX

Towing capacity of 3,500 kg or 5,000 kg

This handy electric tow tug comes in two models: the XL 800 and the XL 1500. The XL 800 offers a towing capacity of 3,500 kg, while the XL 1500 steps it up to 5,000 kg. There's also a wide range of additional options available, including various steering arms, nose wheels, tyres and couplings.

We're happy to help

you find the configuration that best suits your needs.

Perfect for caravans, trailers and trolleys

Whichever model you choose, the XL is a strong and silent force you can rely on. It's perfect for all kinds of trolleys, trailers, semi-trailers and caravans – and much more. Need to move a speedboat? The XL can handle it. A barrel organ? No problem. You can even move a helicopter with it, on both hard and soft surfaces.

Lighten the load

Let this quiet powerhouse handle the heavy lifting and lighten the load for your team. Its electric motor is whisper-quiet yet remarkably powerful, helping you save time and boost comfort on the shop floor. The XL is a real asset for any business, and a sustainable investment to boot.





XL / Couplings



MMON09138

Basic interchangeable coupling, low, with tube locking pin



MMON09137

Basic interchangeable coupling, high, with tube locking pin



VLKA01851

Ball coupling



MMON03475

Pin coupling, Sulo tow hook, 20 mm (≈ 0.79 in)



VLKA08649

Industrial hook coupling, 90 mm (≈ 3.54 in), with 25 mm (≈ 0.98 in) pin and ball coupling



VLKA09353

Industrial spring-mounted hook coupling with 25 mm (≈ 0.98 in) pin



VLKA09471

Double industrial hook coupling 25 mm (≈ 1 in)

XL / Couplings



VMON06648

Industrial hook coupling



VLKA00051

Rockinger coupling RO244A35002



VLKA07935

Rockinger coupling RO244L35002 with foot release



VMON08565

Spring coupling with adjustable connection



VLKA08228

Height-adjustable adapter, 600 mm (≈ 23.6 in)



VLKA08229

Height-adjustable adapter, 800 mm (≈ 31.5 in)



MMON01908

Electric coupling with pin/ball



VMON06557

Central hydraulic coupling

XL / Couplings



MMON06664

Single-stage hydraulic coupling



MMON08183

Two-stage hydraulic coupling



VMON08512

Three-stage hydraulic coupling



MMON04334

Vertical hydraulic coupling,
450 mm (≈ 17.7 in)



VMON08397

Vertical hydraulic coupling,
700 mm (≈ 27.6 in)



MMON06375

Push bar, L = 400 mm (≈ 15.7 in),
H = 130 mm (≈ 5.1 in)



MMON03975



Utility cart coupling,
630 mm (≈ 24.8 in)



MMON07302

Utility cart coupling,
740 mm (≈ 29.1 in)

	XL 800	XL 1500
Maximum towing capacity	3,500 kg (≈ 7,716 lbs)	5,000 kg (≈ 11,023 lbs)
Maximum tractive force	1.250 N	2.000 N
Voltage	24 V	24 V
Drive system	Differential drive	Differential drive
Motor	800 W DC	1500 W DC
Brake system	Regenerative	Regenerative
Parking brake	Electromagnetic	Electromagnetic
Horn	Yes	Yes
Battery indicator	Yes	Yes
Forward speed	5 km/h (≈ 3.1 mph)	5 km/h (≈ 3.1 mph)
Reverse speed	5 km/h (≈ 3.1 mph)	5 km/h (≈ 3.1 mph)
Standard drive wheels	Pneumatic	Pneumatic
Steering wheel	Solid rubber	Solid rubber
Machine weight including battery	150 kg incl. battery (≈ 331 lbs)	150 kg incl. battery (≈ 331 lbs)
Maximum permissible counterweight	200 kg (≈ 441 lbs)	200 kg (≈ 441 lbs)
Dimensions LxWxH	1604 × 817 × 1024 mm (≈ 63.2 × 32.2 × 40.3 in)	1604 × 817 × 1024 mm (≈ 63.2 × 32.2 × 40.3 in)
Standard battery	2 × 12 V 60 Ah AGM, maintenance-free	2 × 12 V 60 Ah AGM, maintenance-free
Battery charger	External 230 V 8 A	External 230 V 8 A

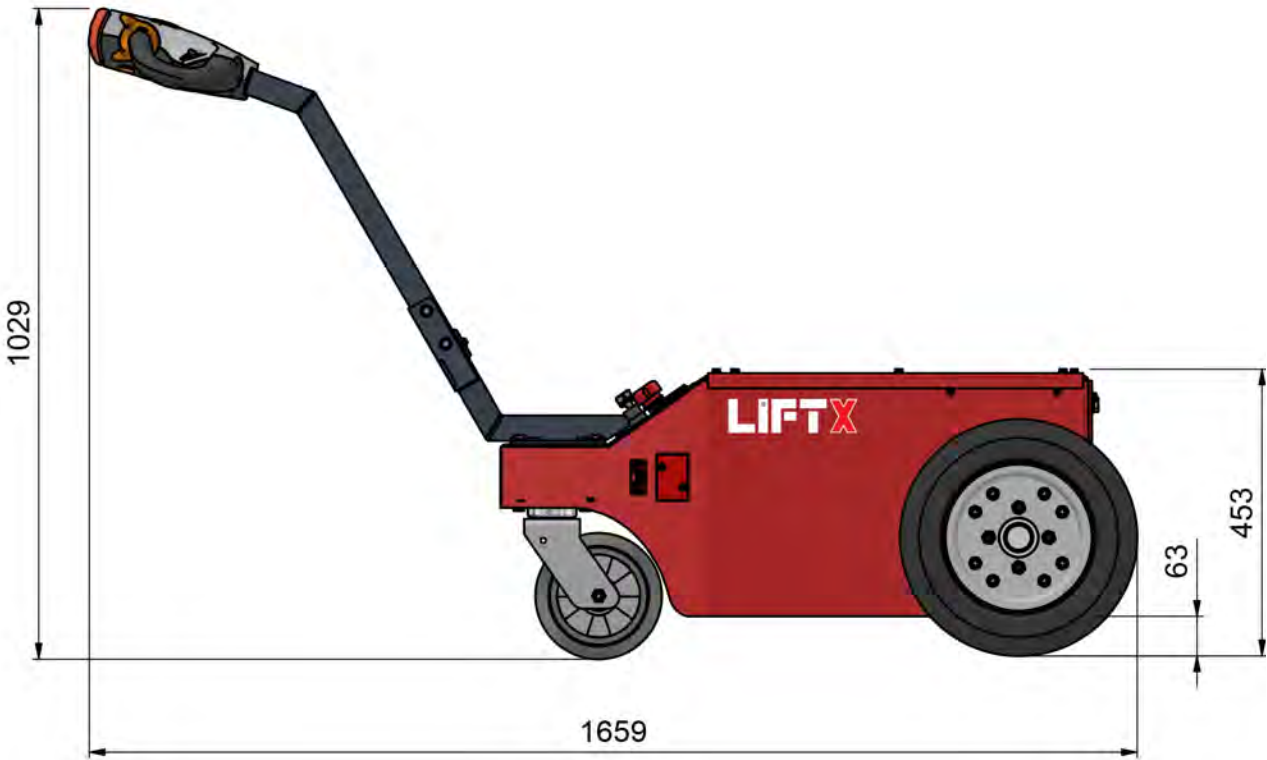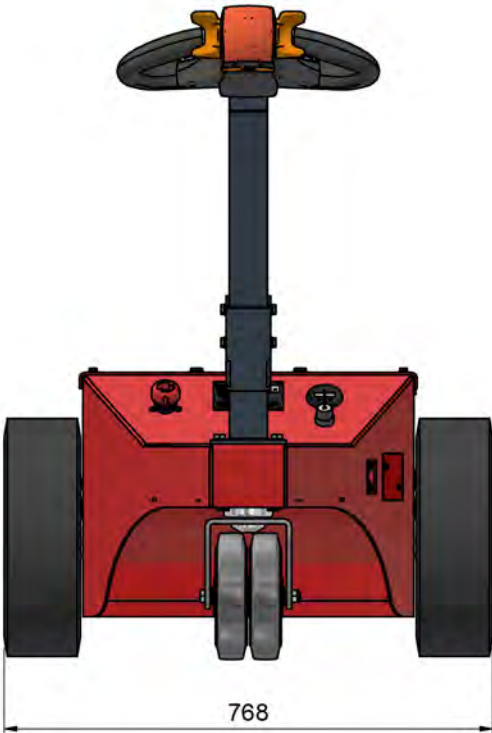

www.liftx.com.tr

LIFTX