

# LIFTX

LT36



[www.liftx.com.tr](http://www.liftx.com.tr)

## LT36



### **Electric tow tug with lifting capacity**

The LT36 is a true all-rounder, capable of both moving and lifting loads. With its towing capacity of 6,000 kg and lifting capacity of 3,000 kg, this electric tow tug is perfectly suited for a wide range of tasks and industries. And thanks to its powerful electric motor, you can go about your daily work without noise or carbon emissions.

### **Flexible and reliable**

This versatile electric tow tug lets you lift loads slightly before moving them horizontally – ideal for single-axle trailers or other two-wheeled loads. The LT36 comes standard with a hydraulic lift, lifting eyes and a powerful electric motor. We can fully customise the coupling to your specific requirements.

### **Safe and efficient**

Handling heavy loads comes with risks – but the LT36 electric tow tug helps keep them to a minimum. It lets your team work faster and safer, boosting efficiency on the shop floor and driving down costs.









**VMON09242**

VMLT36 standard coupling holder  
300 mm (≈ 11.8 in)



**VMON11359**


VMLT36 coupling holder,  
400 mm (≈ 15.7 in),  
(extended 100 mm (≈ 3.9 in))



**VMON11360**

Coupling holder,  
600 mm (≈ 23.6 in)  
(extended 300 mm (≈ 11.8 in))

| LT36                              |                                                |
|-----------------------------------|------------------------------------------------|
| Maximum towing capacity           | 6,000 kg (≈ 13,228 lbs)                        |
| Maximum tractive force            | 2,340 N                                        |
| Voltage                           | 24 V                                           |
| Drive system                      | Electric drive wheel                           |
| Motor                             | 2,600 W                                        |
| Brake system                      | Regenerative                                   |
| Parking brake                     | Electromagnetic                                |
| Horn                              | Yes                                            |
| Battery indicator                 | Yes                                            |
| Forward speed                     | 5 km/h (≈ 3.1 mph)                             |
| Reverse speed                     | 5 km/h (≈ 3.1 mph)                             |
| Standard drive wheels             | Solid rubber                                   |
| Steering wheel                    | Solid rubber                                   |
| Machine weight including battery  | 650 kg incl. battery (≈ 1,433 lbs)             |
| Maximum permissible counterweight | –                                              |
| Dimensions LxWxH                  | 1205 × 746 × 1394 mm (≈ 47.4 × 29.4 × 54.9 in) |
| Standard battery                  | 2 × 12 V 100 Ah AGM, maintenance-free          |
| Battery charger                   | External, 230 V 12 A                           |

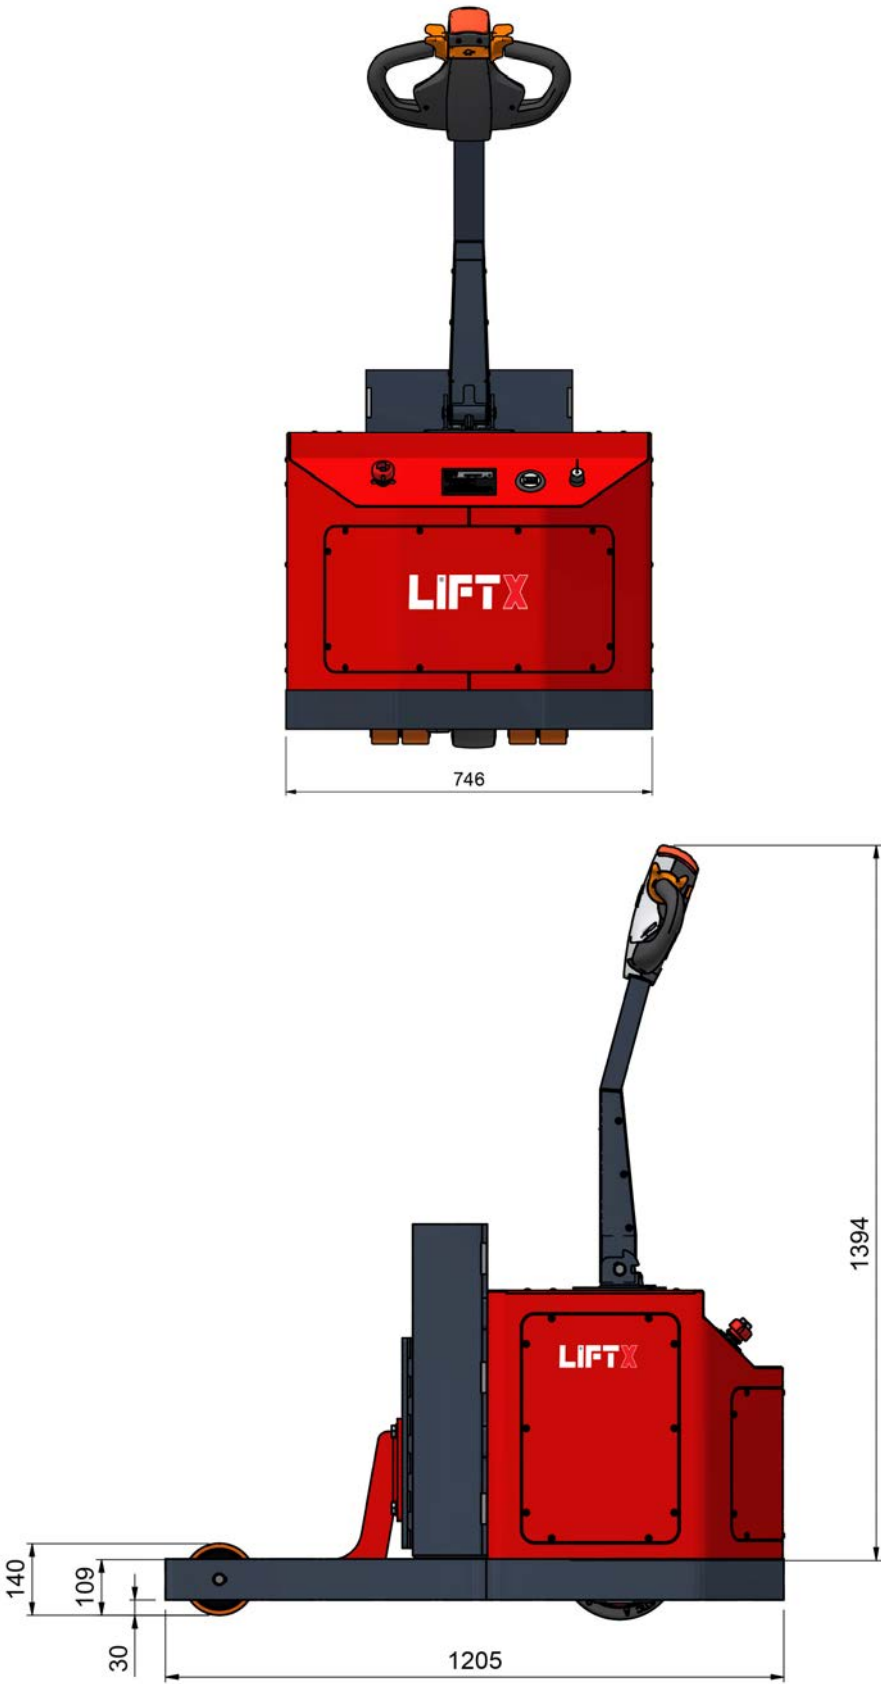

[www.liftx.com.tr](http://www.liftx.com.tr)

**LIFTX**